










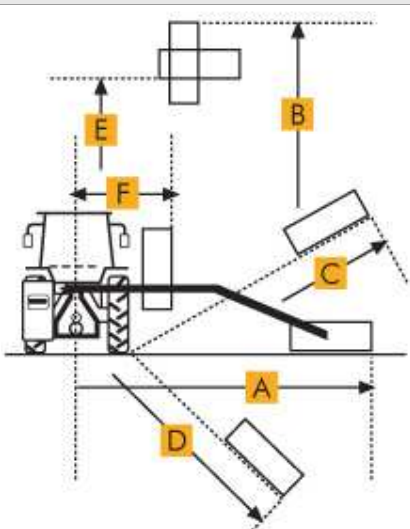


SPECIFICATIONS mod. M600 / M600A

											
	cm	Hp	Kg	g/min	n°	°	lt	Hp	Kg	cm	PTO
M600	120	54	1150	3000	40	245	205	90/100	> 3500	220	540
M600A	120	54	1200	3000	40	245	205	100/120	> 4000	220	540
Central rotation of the arms 90°											

	Position	M600	M600A
	A	cm 615	cm 615
	B	cm 750	cm 750
	C	cm 580	cm 580
	D	cm 600	cm 600
	E	cm 630	cm 630
	F	cm 150	cm 150
	G	-	cm 150
<p> A - Max working lenght on levelled ground B - Max working lenght in vertical position C - Max working lenght at 45° D - Max working lenght at 45° (ditch) E - Max height above the side a hedge F - Minimum height above the side of the hedge G - Cutting head advancement </p>			