










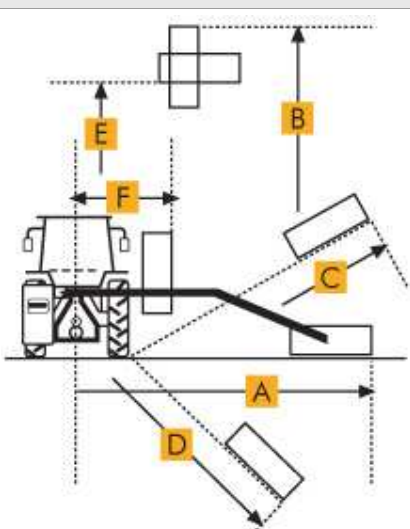


SPECIFICATIONS mod. M610S / M800

											
	cm	Hp	Kg	g/min	n°	°	lt	Hp	Kg	cm	PTO
M610S	125	65	1700	3000	48	245	205	130	> 4500	220	540
M800	125	65	1800	3000	48	245	205	180	> 5000	220	540

	Position	M610S	M800
	A	cm 640	cm 800
	B	cm 800	cm 960
	C	cm 620	cm 780
	D	cm 610	cm 770
	E	cm 675	cm 835
	F	cm 150	cm 150
	Telescopic arm cm 90	Telescopic arm cm 140	
<p>A - Max working length on levelled ground B - Max working length in vertical position C - Max working length at 45° D - Max working length at 45° (ditch) E - Max height above the side a hedge F - Minimum height above the side of the hedge</p>			