










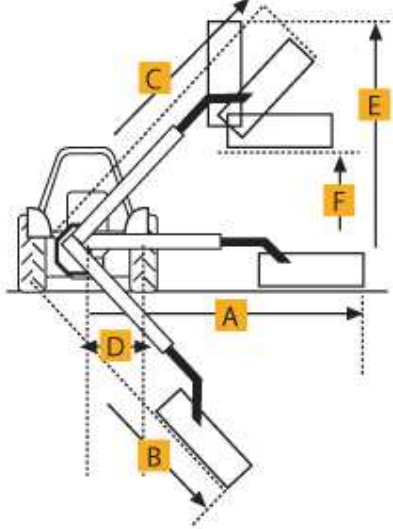


Modelių MT10 / MT12S techninės charakteristikos

											
	cm	Hp	Kg	g/min	n°	°	lt	Hp	Kg	cm	PTO
MT10	100	24	530	3000	40	190	120	50	> 2500	160	540
MT12S	120	40	580	3000	48	190	120	60	> 2800	160	540

	Pozicija	MT10	MT12S
	A	cm 420	cm 260
	B	cm 260 / 290	cm 280 / 310
	C	cm 240 + 50°	cm 260 + 50°
	D	cm 190 - 50°	cm 210 - 50°
	E	cm 130 / 170	cm 130 / 170
	F	cm -70	cm -70
<p>A - Max darbinis ilgis ant lygaus paviršiaus B - Max darbinis ilgis vertikalioje pozicijoje C - Max darbinis ilgis prie 45° D - Max darbinis ilgis prie 45° (šlaite) E - Max pasiekiamas gyvatvorės šono aukštis F - Min pasiekiamas gyvatvorės šono kraštas</p>			